




JXEL-11NM-R | JXEL-13NM-R

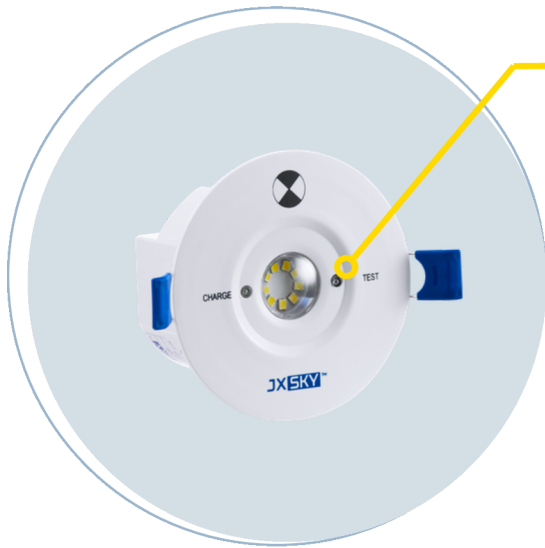


Test Before Installation

The JXSKY Emergency Light Series is equipped with a manual Emergency Light-up Mode, allowing users to verify the product's functionality prior to installation.


1. To activate this mode, press and hold the **Test Switch** for 3 seconds. The LED light will turn on to indicate proper operation.
2. To turn the light off, press and hold the **Test Switch** again for 3 seconds.

If the LED does not light up, the unit may be faulty and should be checked or replaced.


Installation Steps

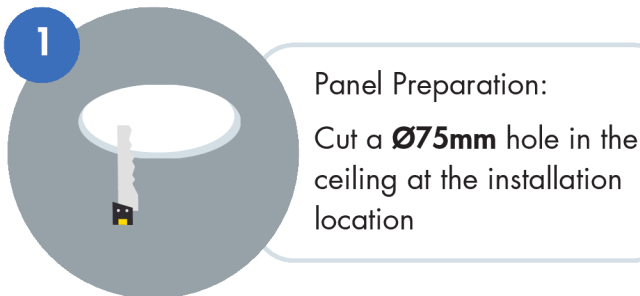


Panel Preparation:
Cut a **Ø75mm** hole in the ceiling at the installation location

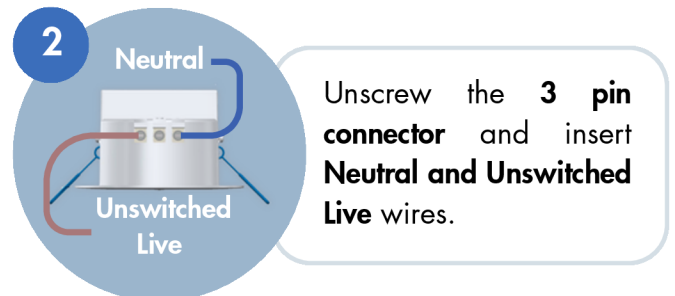

Unscrew the **3 pin connector** and insert **Neutral and Unswitched Live** wires.

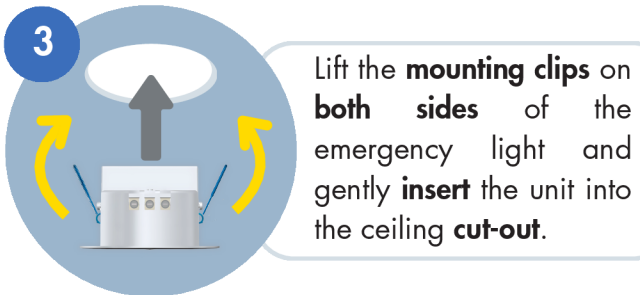


Lift the **mounting clips** on **both sides** of the emergency light and gently **insert** the unit into the ceiling **cut-out**.

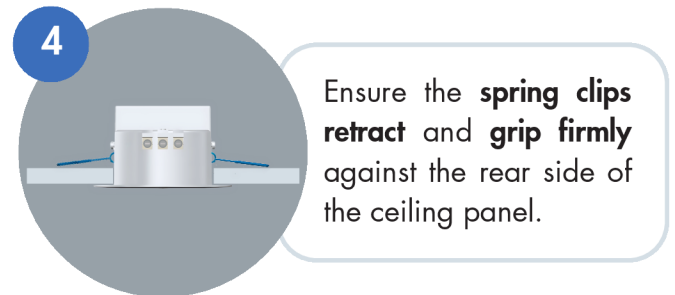


Ensure the **spring clips** **retract** and **grip firmly** against the rear side of the ceiling panel.

Safety Wire Installation: (Recommended)

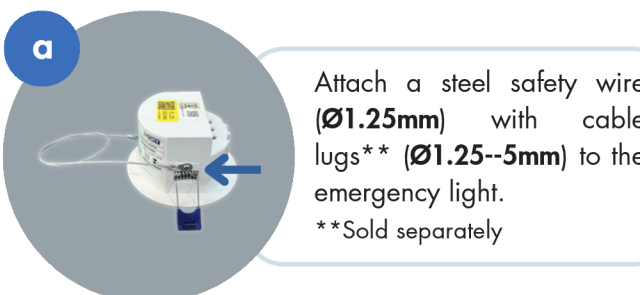

Attach a steel safety wire (**Ø1.25mm**) with cable lugs** (**Ø1.25--5mm**) to the emergency light.
**Sold separately

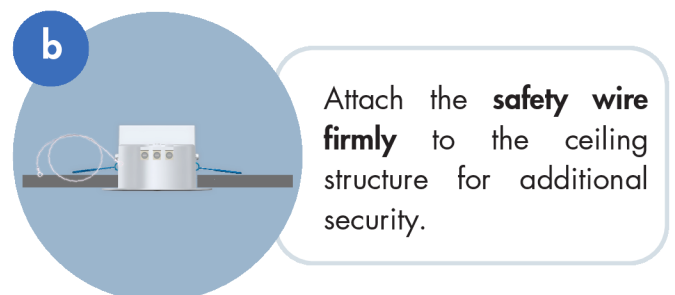

Attach the **safety wire** **firmly** to the ceiling structure for additional security.

Charge the battery for a minimum of 24 hours before using the luminaire as a safety/emergency lighting source.

The luminaire must be installed by a qualified electrician. Always disconnect the power supply before performing any wiring work. Ensure that the input voltage matches the specified voltage range of the product. Ensure that all wiring connections are secure and properly insulated. Before turning the power on, double-check that all wires are correctly connected. Failure to follow these instructions may void the product warranty.

Product specifications may change without prior notice. Images are for illustration only.