




JXTHL-21NM | JXTHL-22NM | JXTHL-24 NM

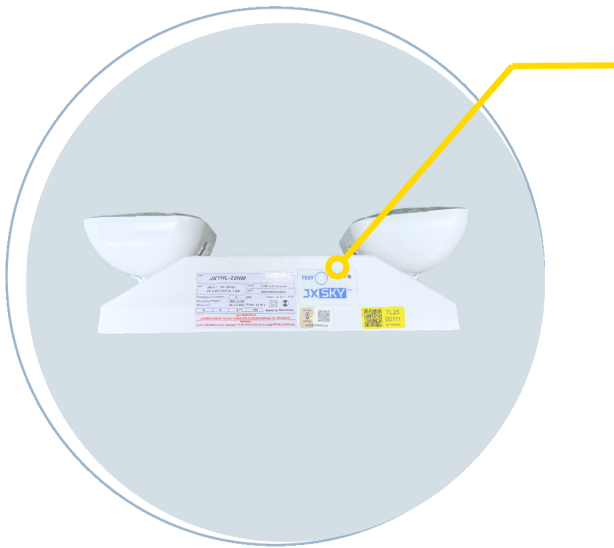

Test Before Installation

The JXSKY Emergency Light Series is equipped with a manual Emergency Light-up Mode, allowing users to verify the product's functionality prior to installation.

1. To activate this mode, press and hold the **Test Switch** for 3 seconds. The LED light will turn on to indicate proper operation.
2. To turn the light off, press and hold the **Test Switch** again for 3 seconds.

If the LED does not light up, the unit may be faulty and should be checked or replaced.

Installation Steps

1

Gently press **both sides** of the unit with a **test pen** to release the back cover from the casing.

2

Arrange the **wires** through the back casing from the indicated **wire inlet** ($\varnothing_{\max}:20\text{mm}$).

3

Connect **Neutral** and **Unswitched Live** wires.

4

Mount the **back cover** onto the **wall** and ensure it is securely fastened.

5

Press the **unit firmly** into the **secured back cover** until **both clips** click into place.

6

Adjust the **LEDs angle** to achieve the desired **light distributions**.

Charge the battery for a minimum of 24 hours before using the luminaire as a safety/emergency lighting source.

The luminaire must be installed by a qualified electrician. Always disconnect the power supply before performing any wiring work. Ensure that the input voltage matches the specified voltage range of the product. Ensure that all wiring connections are secure and properly insulated. Before turning the power on, double-check that all wires are correctly connected. Failure to follow these instructions may void the product warranty.